CITY PLAN COMMISSION

THURSDAY, AUGUST 7, 2025

FILE NUMBER: PLAT-25-000034 (S245-201) SENIOR PLANNER: Sharmila Shrestha

LOCATION: Wheatland Road, east of Polk Street

DATE FILED: June 27, 2025 **ZONING:** MF-2(A), R-7.5(A)

CITY COUNCIL DISTRICT: 8 SIZE OF REQUEST: 14.966-acres

OWNER: Southwest Region Conference

REQUEST: An application to create one 14.966-acre lot from a tract of land in City Block 7576 on property located on Wheatland Road, east of Polk Street.

SUBDIVISION HISTORY:

1. S156-211 was a request west of the present request to create one 0.918-acre lot from a tract of land located in City Block 7577 on property located on Polk Street between Wheatland Road and Interstate 20. The request was approved on June 30, 2016, and was recorded on August 30, 2018.

STAFF RECOMMENDATION: Section 51A-8.503 states that "lots must conform in width, depth, and area to the pattern already established in the adjacent areas, having due regard to the character of the area, its particular suitability for development, and taking into consideration the natural topography of the ground, drainage, wastewater facilities, and the proposed layout of the streets."

The request lies in MF-2(A) Multi Family District and R-7.5(A) Single Family District. The lots are being created from a tract of land; therefore, it does not qualify for a residential replat and can be approved on the consent agenda. It is a policy of the city that institutional uses (church) generally require greater land area than traditional residential or non-residential lots and generally serve, and are compatible with the neighborhood; therefore, staff concludes that the request is in compliance with Section 51A-8.503 and with the requirements of MF-2(A) Multi Family District and R-7.5(A) Single Family District; therefore, staff recommends approval of the request subject to compliance with the following conditions:

General Conditions:

- 1. The final plat must conform to all requirements of the Dallas Development Code, Texas Local Government Code, Texas Land Surveying Practices Act and the General Rules and Regulations of the Texas Board of Land Surveying.
- 2. Department of Development Services, Engineering Division must verify that the plat conforms with the water, wastewater, and easement requirements under the provisions of Chapter 49 of the Dallas City Code.
- 3. Compliance with all plans, contracts, ordinances, and requirements of the City of Dallas. Section 51A-8.102(a), (b), (c), and (d)

- 4. The number and location of fire hydrants must comply with the Dallas Fire Code.
- 5. Any new or existing structure may not extend across new property lines. *Section* 51A-8.503(e)
- 6. On the final plat, all easement abandonments, and ROW abandonments must be by separate instrument with the recording information shown on the face of the plat. A release from the Real Estate Division is required prior to the plat being submitted to the Chairman for signature.
- 7. On the final plat, include two boundary corners tagged with these coordinates: "Texas State Plane Coordinate System, North Central Zone, North American Datum of 1983 on Grid Coordinate values, No Scale and no Projection."
- 8. On the final plat, monument all set corners per the Monumentation Ordinance. Prior to submittal of the final plat for the Chairman's signature. The monuments must be verified by the Chief City Surveyors Office in the Public Works Department. Section 51A-8.617
- 9. Provide ALL supporting documentation (i.e. deeds, plats, ordinances, easements...etc) with a completed Final Plat Checklist to the Survey Plat Review Group (**SPRG**) with the Final Plat Submittal <u>after</u> City Plan Commission Approval.
- 10. Prior to the final plat, submit a tree survey to the Arborist. A release from the arborist is required prior to an early release request or the recordation of the plat, whichever occurs first.
- 11. The number of lots permitted by this plat is one.

Paving & Drainage Conditions:

- 12. Submit a full set of Civil Engineering Plans (drainage, paving, street signage/marking/lighting) prepared per City Standards by a licensed (TX) Professional Engineer to Engineering Division in Room 200, Oak Cliff Municipal Center (i.e. 311T/DP). Additions and alterations to the public infrastructure require approval and may require private development contracts with bonds.51A-8.102 (c); 8.601(b)(4),(5),(6),(7),(8),(9)
- 13. Detention may be required if the capacity of available outfall is not adequate to carry the developed runoff. Section 51A-8.611(c).
- 14. Place a note on the final plat stating "Lot-to-Lot drainage will not be allowed without proper City of Dallas Engineering Division approval" 51A 8.611(e)

Right-of way Requirements Conditions:

15. On the final plat, dedicate 50 feet of right-of-way (via fee simple) from the established center line of Wheatland Road. Section 51A 8.602(c)

Survey (SPRG) Conditions:

16. Prior to final plat, submit a completed final plat checklist and all supporting documents.


- 17. On the final plat, show how all adjoining right-of-way was created. Section 51A-8.403(a)(1)(A)(xxii).
- 18. On the final plat, show recording information on all existing easements within 150 feet of the property.
- 19. On the final plat, show all additions or tracts of land within 150 feet of the property with recording information. Platting Guidelines.


Dallas Water Utilities Conditions:


- 20. Additional design information is required for assessment. Site plan must be submitted showing proposed development, building finished floor elevation, development, existing mains including downstream manhole, and proposed water and wastewater service locations. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
- 21. Wastewater main improvements is required by Private Development Contract. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
- 22. Water main improvements may be required by Private Development Contract. Submit water/wastewater Engineering Plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
- 23. Existing and any proposed Water and Wastewater Easements must be shown and/or increased to conform to current design standards. **Notice:** Minimum DWU easement size 20' for one utility and 25' for both water and sewer. Larger diameter or deeper mains may require additional width.


Street Light/ Street Name/ GIS, Lot & Block Conditions:

- 24. Prior to final plat, additional design information needed to complete review. Provide a brief description of the proposed project and a copy of the preliminary plat to daniel.silva1@dallas.gov to determine street lighting requirements.
- 25. On the final plat, change "West Wheatland Road" To "Wheatland Road (FKA Duncanville-Wheatland Road)". Section 51A-8.403(a)(1)(A)(xii).
- 26. On the final plat, identify the property as Lot 1 in City Block A/7576.

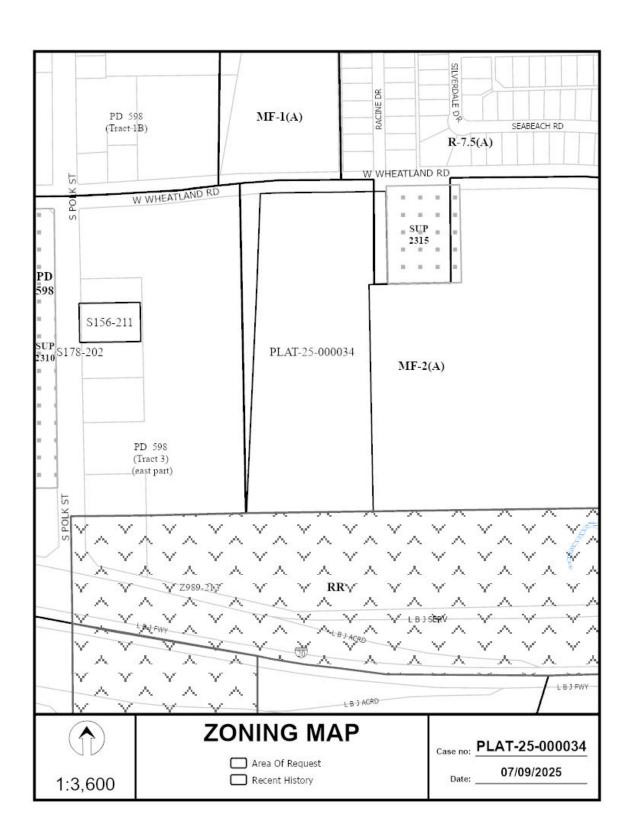

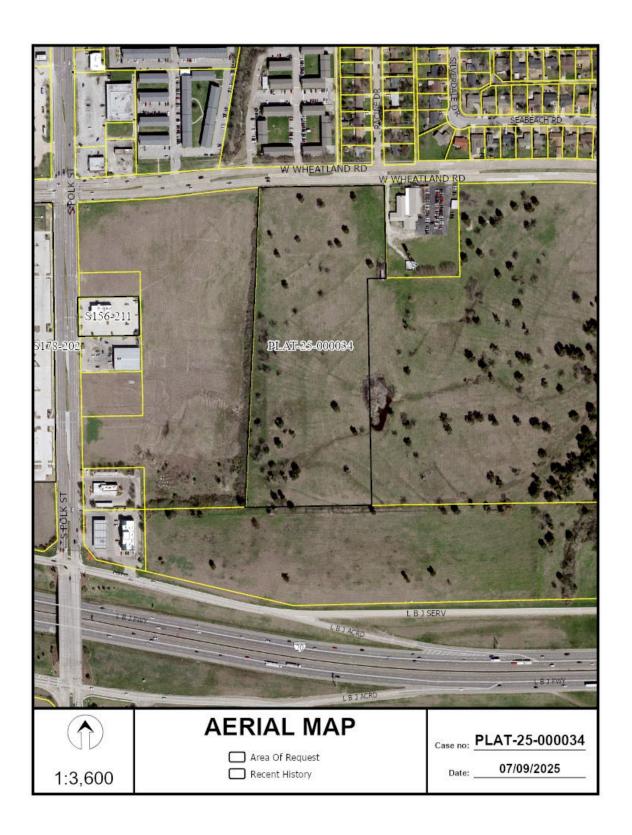

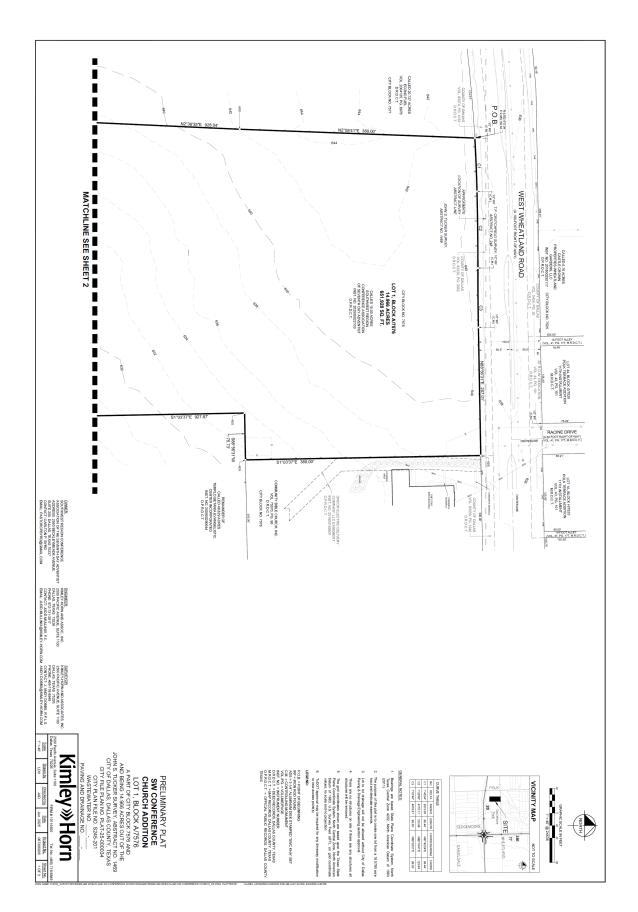

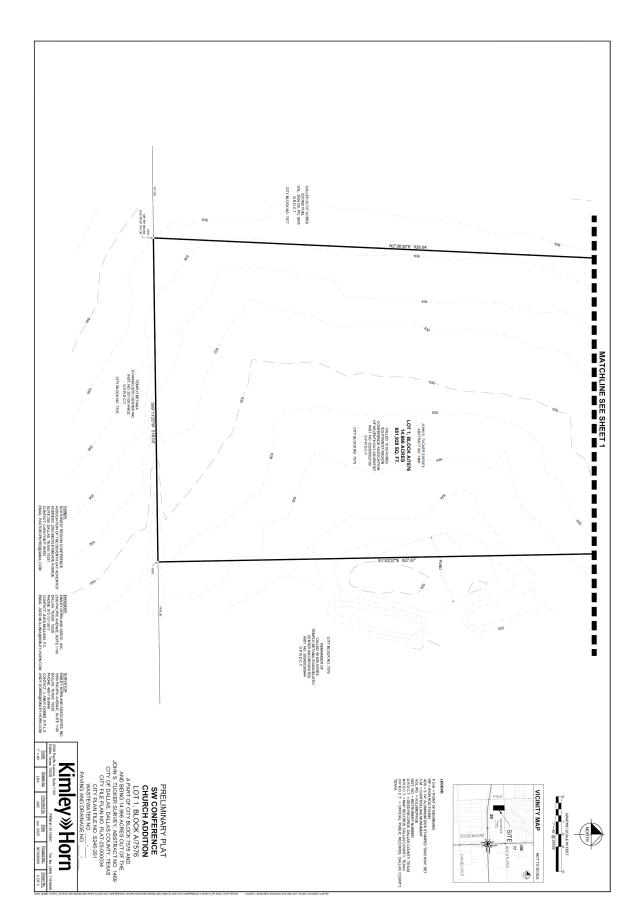

	CONCRETE CERTIFICATE SATION TRACE WHITE A SATION
OMES ADDRESS AND RECOVER CONFERENCE ADDRESS AND RECOVER CONF	OWNER'S DEDICATION NOT ITSEED PROCESS. NOW ALL RESULT TRISSE PRESENTS. THE SOUTHWEST REGION CONTRIBUTED, ASSOCIATION OF THE SOUTHINE DAY ADDRESS AND IN PROPERTY BY A PROPERTY BY A DESCRIPTION OF THE SOUTHWEST REGION CONTRIBUTED. ASSOCIATION OF THE SOUTHWEST BY A DESCRIPTION OF THE SOUTHWEST REGION CONTRIBUTED ASSOCIATION OF THE SOUTHWEST REGION CONTRIBUTED ASSOCIATION OF THE SOUTHWEST REGION CONTRIBUTED ASSOCIATION OF THE SOUTHWEST REGION OF THE SOUTHWEST
PRELIMINARY PLAT SW CONFERENCE CHURCH ADDITION DATE SHOWS AND SECONTS ACCOUNTY. TEXAS SECONT FOR SHOWS AND ASSCORES ACCOUNTY. TEXAS SECONT FOR SHOWS ADDITION AND SHORT SHOWS AND ASSCORES ACCOUNTY. TEXAS SECONT FOR SHOWS ADDITION AND SHORT SHOWS AND ASSCORES ACCOUNTY. TEXAS SECONT FOR SHOWS ADDITION AND SHORT SHOWS AND ASSCORES ACCOUNTY. TEXAS CUTY FLE PLAN ITER NO. SAMETY SHOWS AND ASSCORES ACCOUNTY. TEXAS CUTY FLE PLAN ITER NO. SAMETY SHOWS AND ASSCORES ACCOUNTY. TEXAS CUTY FLE PLAN ITER NO. PANING AND DRAINAGE NO. TO THE PLAN ITER NO. PANING AND DRAINAGE NO. TO THE PLAN ITER NO. PANING AND DRAINAGE NO. TO THE PLAN ITER NO. PANING AND DRAINAGE NO. TO PLAN ITER NO. PANING AND DRAINAGE NO. TO PLAN ITER NO. TO THE PLAN ITER NO. TO THE PLAN ITER NO. TO THE PLAN ITER NO. PANING AND DRAINAGE NO. TO THE PLAN ITER	LIMPTOPER STATEMENT: