

CITY PLAN COMMISSION**FILE NUMBER:** PLAT-25-000171**THURSDAY, January 15, 2026****SENIOR PLANNER:** Hema Sharma**LOCATION:** Singleton Boulevard, west of Hampton Road**DATE FILED:** December 19, 2025**ZONING:** CR**CITY COUNCIL DISTRICT:** 6**SIZE OF REQUEST:** 0.650-acres**APPLICANT/OWNER:** DW Trinity Bros., LLC

REQUEST: An application to replat a 0.650-acre tract of land containing portion of Lots 1, 2, 6 and 7 in City Block A/ 7135 and a tract of land in City Block 7135 and to include 15-foot abandoned alley to create one lot on property located on Singleton Boulevard, west of Hampton Road.

SUBDIVISION HISTORY:

1. S223-122 was a request south of the present request to replat a 0.133-acre tract of land containing part of Lots 21 and 22 in City Block 8/7234 to create one 2,935 Square feet and one 2,876 square feet lot on property located on Hampton Road, north on Akron Street. The request was approved on May 4, 2023, but has not been recorded.

STAFF RECOMMENDATION: The request complies with the requirements of the CR Community Retail District; therefore, staff recommends approval of the request subject to compliance with the following conditions:

General Conditions:

1. The final plat must conform to all requirements of the Dallas Development Code, Texas Local Government Code, Texas Land Surveying Practices Act and the General Rules and Regulations of the Texas Board of Land Surveying.
2. Department of Development Services, Engineering Division must verify that the plat conforms with the water, wastewater, and easement requirements under the provisions of Chapter 49 of the Dallas City Code.
3. Compliance with all plans, contracts, ordinances, and requirements of the City of Dallas. *Section 51A-8.102(a), (b), (c), and (d)*
4. The number and location of fire hydrants must comply with the Dallas Fire Code.
5. Any new or existing structure may not extend across new property lines. *Section 51A-8.503(e)*
6. On the final plat, all easement abandonments, and ROW abandonments must be by separate instrument with the recording information shown on the face of the plat. A release from the Real Estate Division is required prior to the plat being submitted to the Chairman for signature.

7. On the final plat, include two boundary corners tagged with these coordinates: "Texas State Plane Coordinate System, North Central Zone, North American Datum of 1983 on Grid Coordinate values, No Scale and no Projection."
8. On the final plat, monument all set corners per the Monumentation Ordinance. Prior to submittal of the final plat for the Chairman's signature. The monuments must be verified by the Chief City Surveyors Office in the Public Works Department. *Section 51A-8.617*
9. Provide ALL supporting documentation (i.e. deeds, plats, ordinances, easements...etc) with a completed Final Plat Checklist to the Survey Plat Review Group (**SPRG**) with the Final Plat Submittal after City Plan Commission Approval.
10. Prior to the final plat, submit a tree survey to the Arborist. A release from the arborist is required prior to an early release request or the recordation of the plat, whichever occurs first.
11. The number of lots permitted by this plat is one.

Paving & Drainage Conditions:

12. Submit a full set of Civil Engineering Plans (drainage, paving, street signage/marking/lighting) prepared per City Standards by a licensed (TX) Professional Engineer to Engineering Division in Room 200, Oak Cliff Municipal Center (i.e. 311T/DP). Additions and alterations to the public infrastructure require approval and may require private development contracts with bonds.51A- 8.102 (c); 8.601(b)(4),(5),(6),(7),(8),(9)
13. Detention may be required if the capacity of available outfall is not adequate to carry the developed runoff. *Section 51A-8.611(c)*.
14. "Lot-to-Lot drainage will not be allowed without proper City of Dallas Engineering Division approval" (Note must be on the Plat). *51A 8.611(e)*

Right-of way Requirements Conditions:

15. Must coordinate with Transportation Department for any traffic signal requirements that are deemed necessary for improving pedestrian accessibility and safety related to site development (Contact Srinivasa Veeramallu with Traffic Signals). *51A-8.606, 51A-8.608*
16. All the new development within The City of Dallas needs to have sidewalk and buffer and must comply with city standards from figure 4.46 of 2019 street design manual or zoning requirement whichever is more restricted. They must comply with ADA (The Americans with Disabilities Act) /TAS (Texas Accessibility Standards) compliant.

Flood Plain Conditions:

17. On the final plat, determine the 100-year water surface elevation across this addition.
18. On the final plat, dedicate floodway easement, floodway management area or floodway easement (within common area), with the appropriate easement

statement included on the face of the Plat. 51A 8.611(d); DWU Floodplain Management; Drainage Design Manual Addendum V

19. On the final plat, include additional paragraph in Owner's Certificate (pertaining to the floodplain). 51A 8.611(d); DWU Floodplain Management; Drainage Design Manual Addendum V
20. On the final plat, specify minimum fill and minimum finished floor elevations. *Section 51A-8.611(d), Trinity Watershed Management.*
21. On the final plat, show the natural channel set back from the crest of the natural channel. *Section 51A-8.611(d), Trinity Watershed Management.*
22. Prior to submission of the final plat, set floodway monument markers and provide documentation that the monuments have been set. *Section 51A-8.617(d)(1), (2), (3), and (4)*
23. Provide information regarding Fill Permit or Floodplain Alteration Permit if such permit is applied for.

Survey (SPRG) Conditions:

24. Prior to final plat, submit a completed final plat checklist and all supporting documents.
25. On the final plat, show the correct recording information for the subject property.
26. On the final plat, show recording information on all existing easements within 150 feet of the property.
27. On the final plat, show all additions or tracts of land within 150 feet of the property with recording information. Platting Guidelines.


Dallas Water Utilities Conditions:


28. Additional design information is required for assessment. Site plan must be submitted showing proposed development, building finished floor elevation, development, existing mains – including downstream manhole, and proposed water and wastewater service locations. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
29. Wastewater main improvements is required by Private Development Contract. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.

Street Light/ Arborist/ Street Name/ GIS, Lot & Block Conditions:

30. Street lighting requirements are waived due to the fact that the existing adjacent street lights are already LED.
31. Prior to final plat, tree survey requested. Survey must contain DBH, species, and location of trees.

32. On the final plat, change "Singleton Boulevard (FKA Nash Road)" to "Singleton Boulevard (FKA Eagle Ford Road FKA Nash Road)" Section 51A-8.403(a)(1)(A)(xii).
33. On the final plat, identify the property as Lot 1 in City Block DDD/7135.

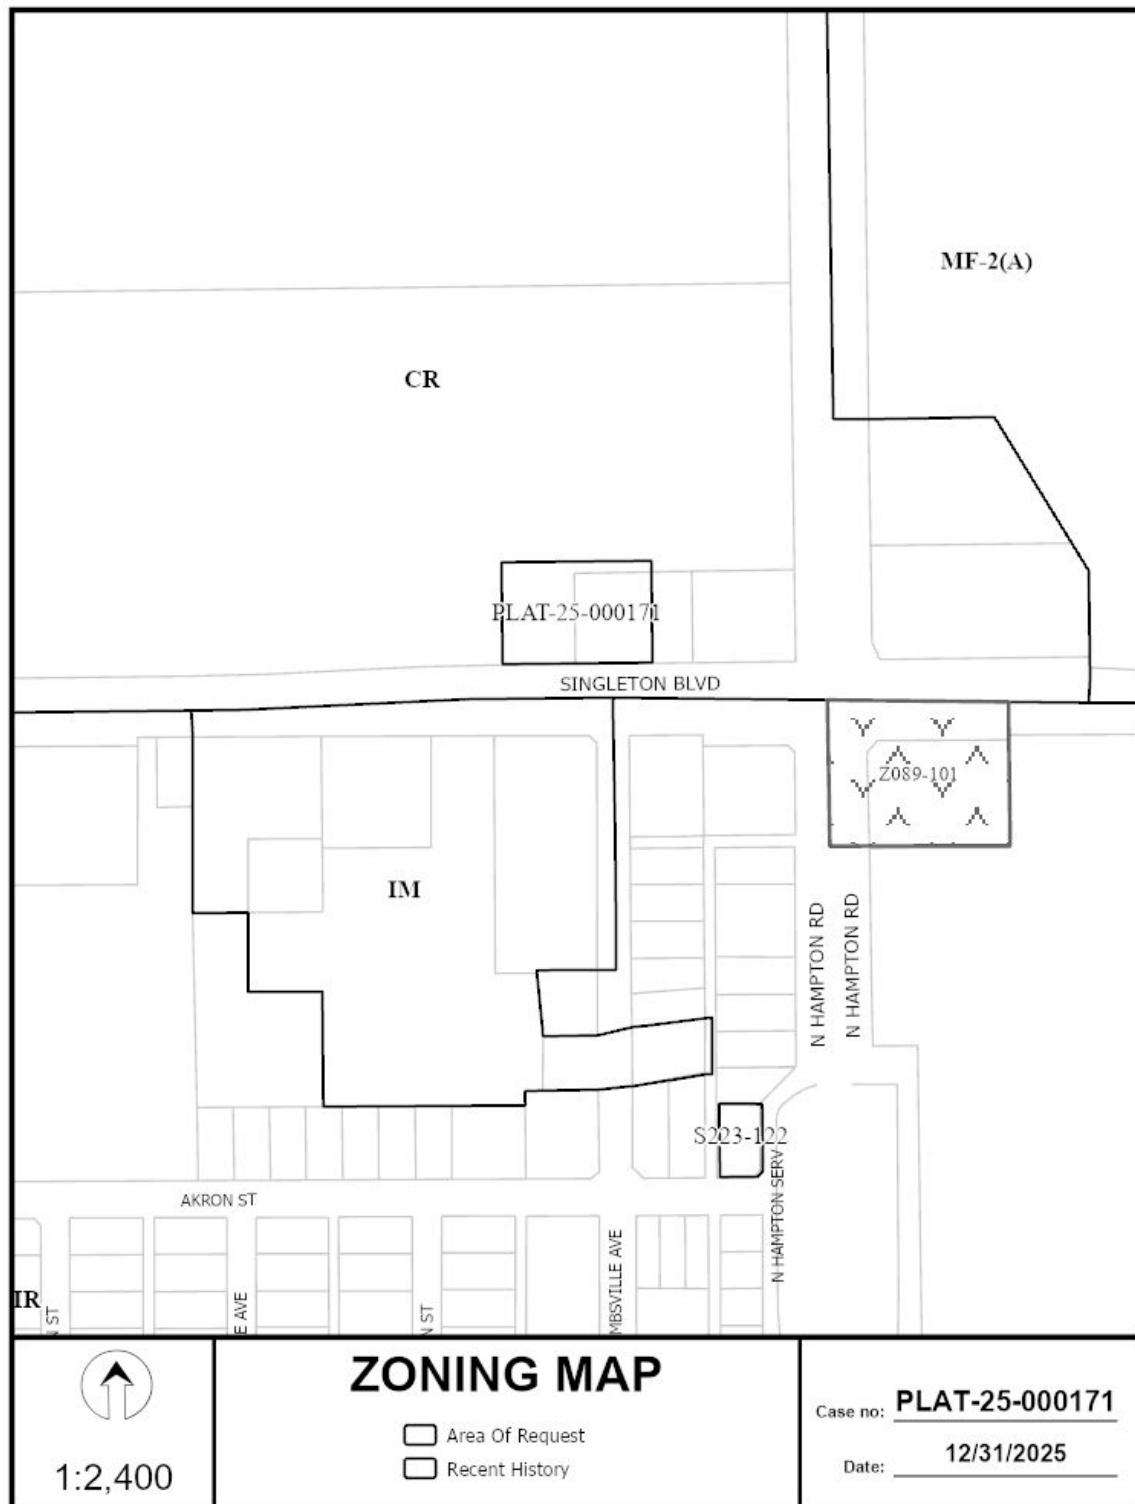

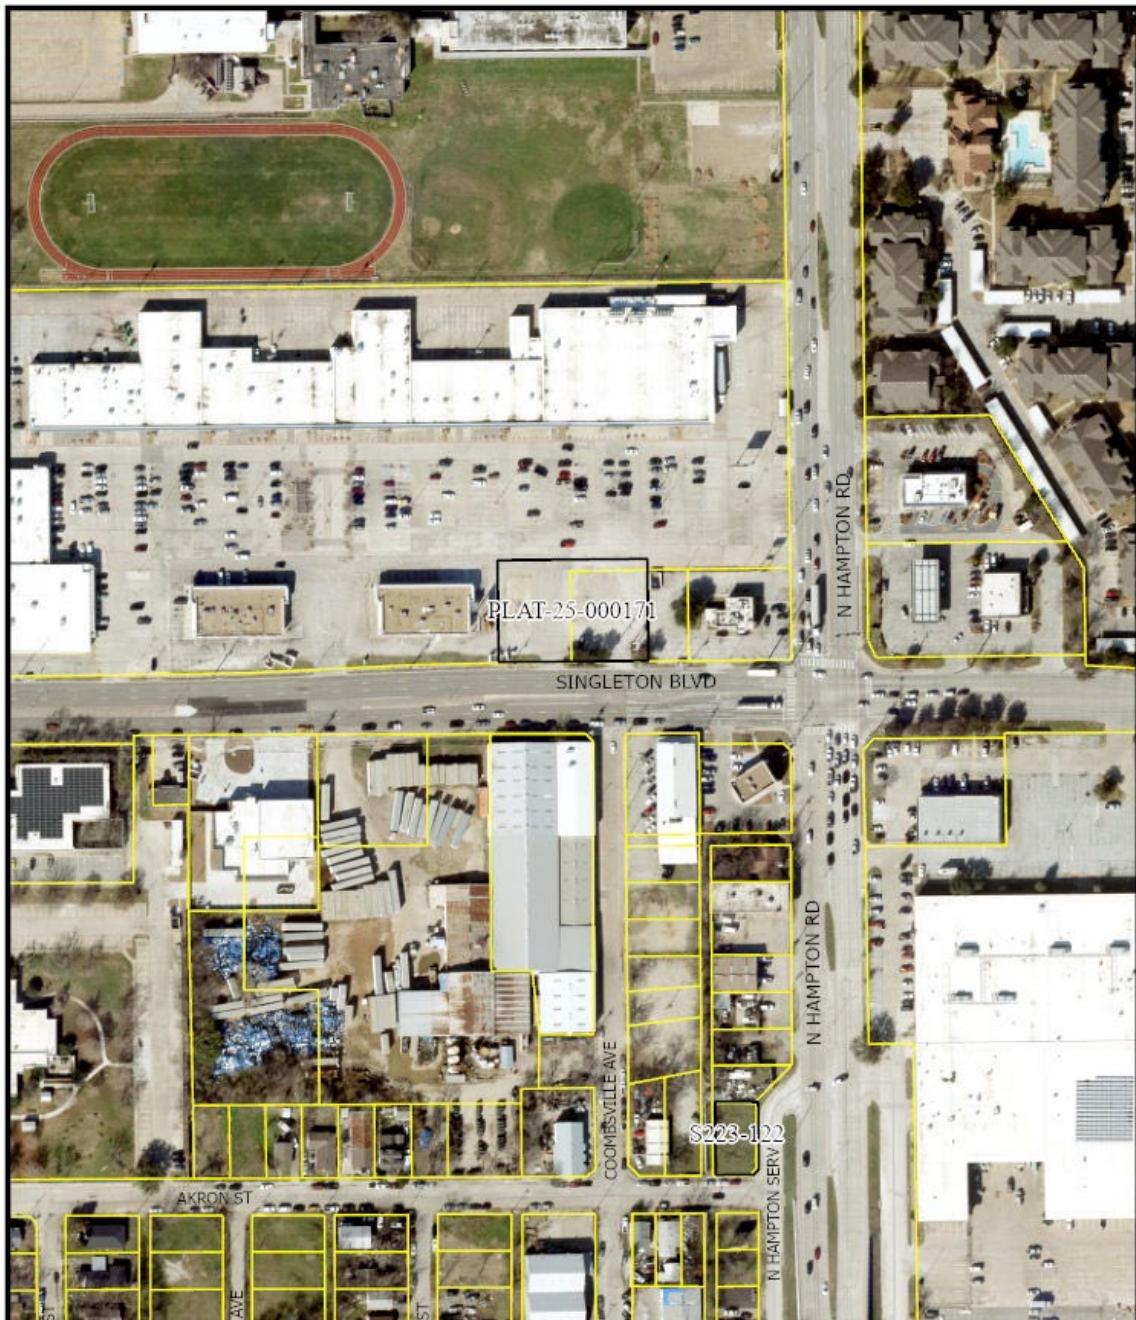

 1:2,400	AERIAL MAP <input type="checkbox"/> Area Of Request <input type="checkbox"/> Recent History	Case no: PLAT-25-000171 Date: 12/31/2025
--	--	---

City Plan Commission Date: 01/15/2026

42(g)

PLAT-25-000171