

**CITY PLAN COMMISSION****THURSDAY, APRIL 10, 2025****FILE NUMBER:** S245-129**SENIOR PLANNER:** Hema Sharma**LOCATION:** Holmes Street, north of Poplar Street**DATE FILED:** March 13, 2025**ZONING:** PD 595 (NC, Tract 26)**PD LINK:** <https://dallascityhall.com/departments/city-attorney/Articles/PDF/Article%20595.pdf>**CITY COUNCIL DISTRICT:** 7**SIZE OF REQUEST:** 0.9238-acres**APPLICANT/OWNER:** Hawk Shah Enterprises, Inc.

**REQUEST:** An application to create one 0.9238-acre lot from a tract of land in City Block 1680 and 1681 on property located on Holmes Street, north of Poplar Street.

**SUBDIVISION HISTORY:** There has been no recent platting activity within close proximity to this request.

**STAFF RECOMMENDATION:** The request complies with the requirements of PD 595 (NC, Tract 26); therefore, staff recommends approval of the request subject to compliance with the following conditions:

**General Conditions:**

1. The final plat must conform to all requirements of the Dallas Development Code, Texas Local Government Code, Texas Land Surveying Practices Act and the General Rules and Regulations of the Texas Board of Land Surveying.
2. Department of Development Services, Engineering Division must verify that the plat conforms with the water, wastewater, and easement requirements under the provisions of Chapter 49 of the Dallas City Code.
3. Compliance with all plans, contracts, ordinances, and requirements of the City of Dallas. *Section 51A-8.102(a), (b), (c), and (d)*
4. The number and location of fire hydrants must comply with the Dallas Fire Code.
5. Any new or existing structure may not extend across new property lines. *Section 51A-8.503(e)*
6. On the final plat, all easement abandonments, and ROW abandonments must be by separate instrument with the recording information shown on the face of the plat. A release from the Real Estate Division is required prior to the plat being submitted to the Chairman for signature.
7. On the final plat, include two boundary corners tagged with these coordinates: "Texas State Plane Coordinate System, North Central Zone, North American Datum of 1983 on Grid Coordinate values, No Scale and no Projection."
8. On the final plat, monument all set corners per the Monumentation Ordinance. Prior to submittal of the final plat for the Chairman's signature. The monuments

must be verified by the Chief City Surveyors Office in the Public Works Department. *Section 51A-8.617*

9. Provide ALL supporting documentation (i.e. deeds, plats, ordinances, easements...etc) with a completed Final Plat Checklist to the Survey Plat Review Group (**SPRG**) with the Final Plat Submittal **after** City Plan Commission Approval.
10. Prior to the final plat, submit a tree survey to the Arborist. A release from the arborist is required prior to an early release request or the recordation of the plat, whichever occurs first.
11. The number of lots permitted by this plat is one.

#### **Paving & Drainage Conditions:**

12. Submit a full set of Civil Engineering Plans (drainage, paving, street signage/marketing/lighting) prepared per City Standards by a licensed (TX) Professional Engineer to Engineering Division in Room 200, Oak Cliff Municipal Center (i.e. 311T/DP). Additions and alterations to the public infrastructure require approval and may require private development contracts with bonds. 51A-8.102 (c); 8.601(b)(4),(5),(6),(7),(8),(9)
13. Detention may be required if the capacity of available outfall is not adequate to carry the developed runoff. Section 51A-8.611(c).
14. Place a note on the final plat stating "Lot-to-Lot drainage will not be allowed without proper City of Dallas Engineering Division approval" 51A 8.611(e)

#### **Right-of way Requirements Conditions:**

15. On the final plat, dedicate 28 feet of right-of-way (via fee simple or street easement) from the established centerline of Holmes Street. *Sections 51A-8.602(c), 51A-8.604(c) and 51A-8.611(c).*
16. On the final plat, add the note: "TxDOT approval may be required for any driveway modification or new access point(s)."

#### **Survey (SPRG) Conditions:**

17. Prior to final plat, submit a completed final plat checklist and all supporting documents.
18. On the final plat, show how all adjoining right-of-way was created. Section 51A-8.403(a)(1)(A)(xxii).
19. On the final plat, show all additions or tracts of land within 150 feet of the property with recording information. Platting Guidelines.

#### **Dallas Water Utilities Conditions:**


20. Additional design information is required for assessment. Site plan must be submitted showing proposed development, building finished floor elevation, development, existing mains – including downstream manhole, and proposed water and wastewater service locations. Submit water/wastewater engineering

plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.


21. Water and Wastewater main improvements may be required by Private Development Contract. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.

**Street Light/ Arborist/ Street Name/ GIS, Lot & Block Conditions:**

22. Prior to final plat, compliance with City's street lighting standards including illumination standards, material, installation, and activation per Street Design Manual.
23. Prior to the final plat, provide revised tree survey. Tree survey provided does not accurately represent tree cover on site.
24. On the final plat, change "Interstate 45 (AKA Julius Schepps freeway)" to "Julius Schepps Freeway/Interstate Highway No. 45". Section 51A-8.403(a)(1)(A)(xii).
25. On the final plat, change "Mcdonald Avenue" to "Mcdonald Street". Section 51A-8.403(a)(1)(A)(xii).
26. On the final plat, add "Botham Jean Boulevard (FKA Lamar Street FKA Cleveland Street FKA Hurst Street)" to plat drawing.
27. On the final plat, identify the property as Lot 1 in City Block A/1680.

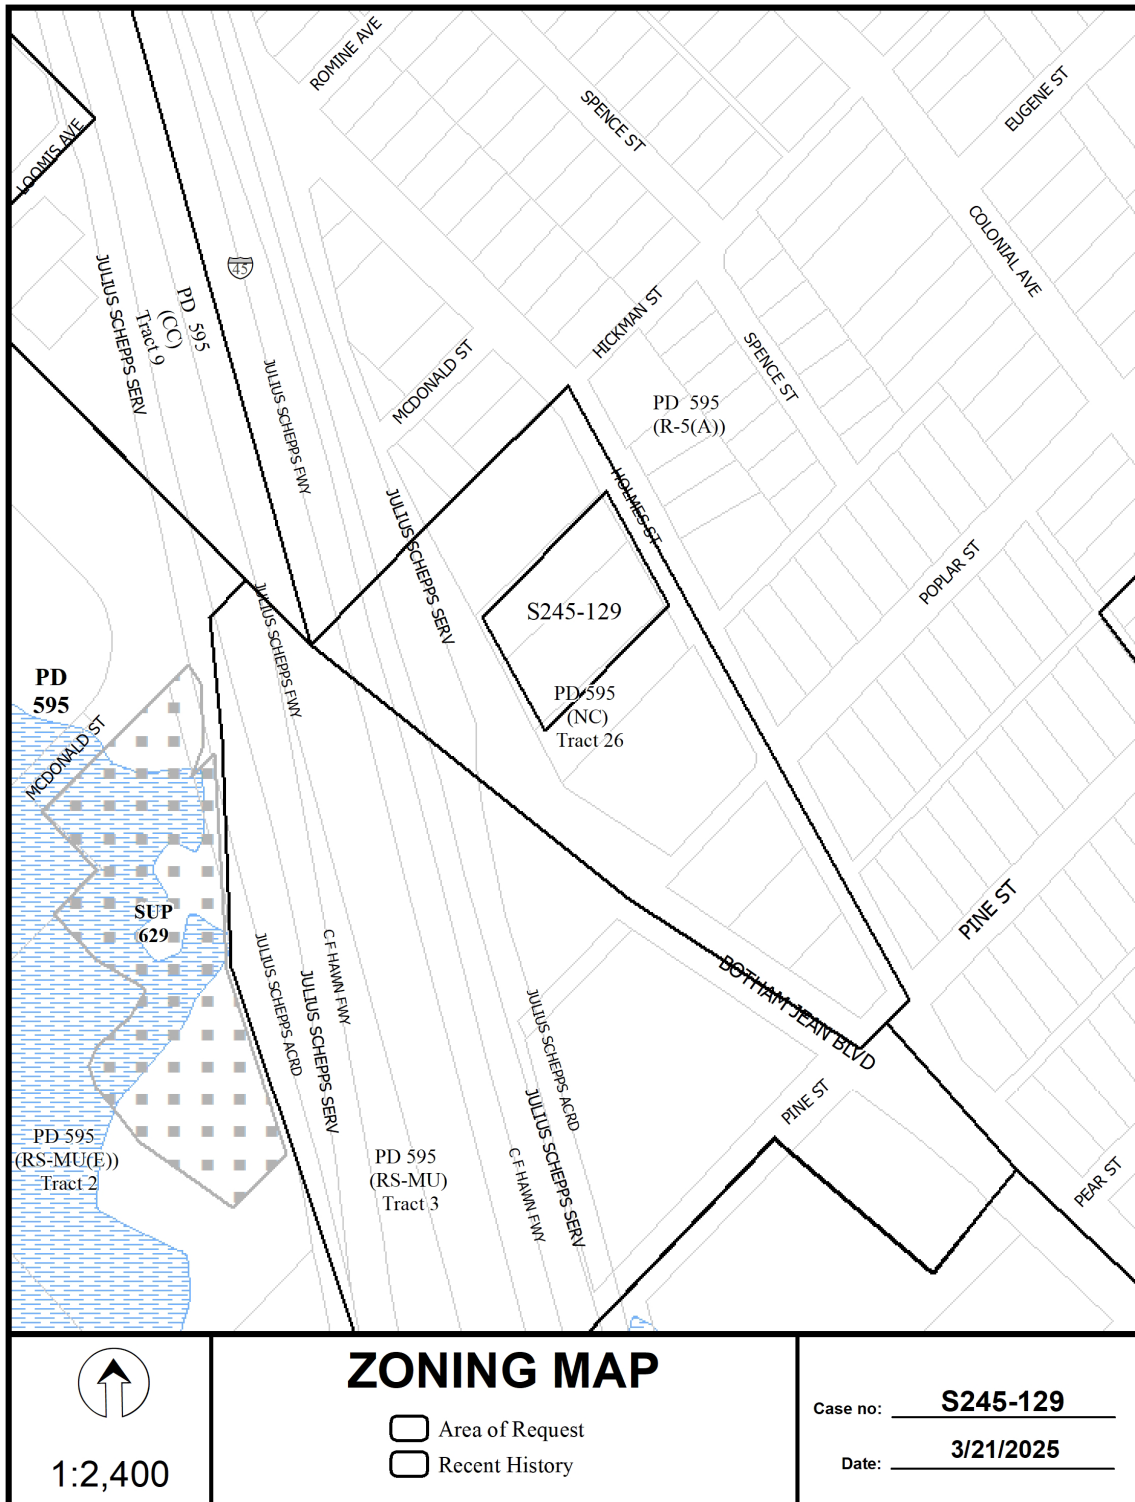



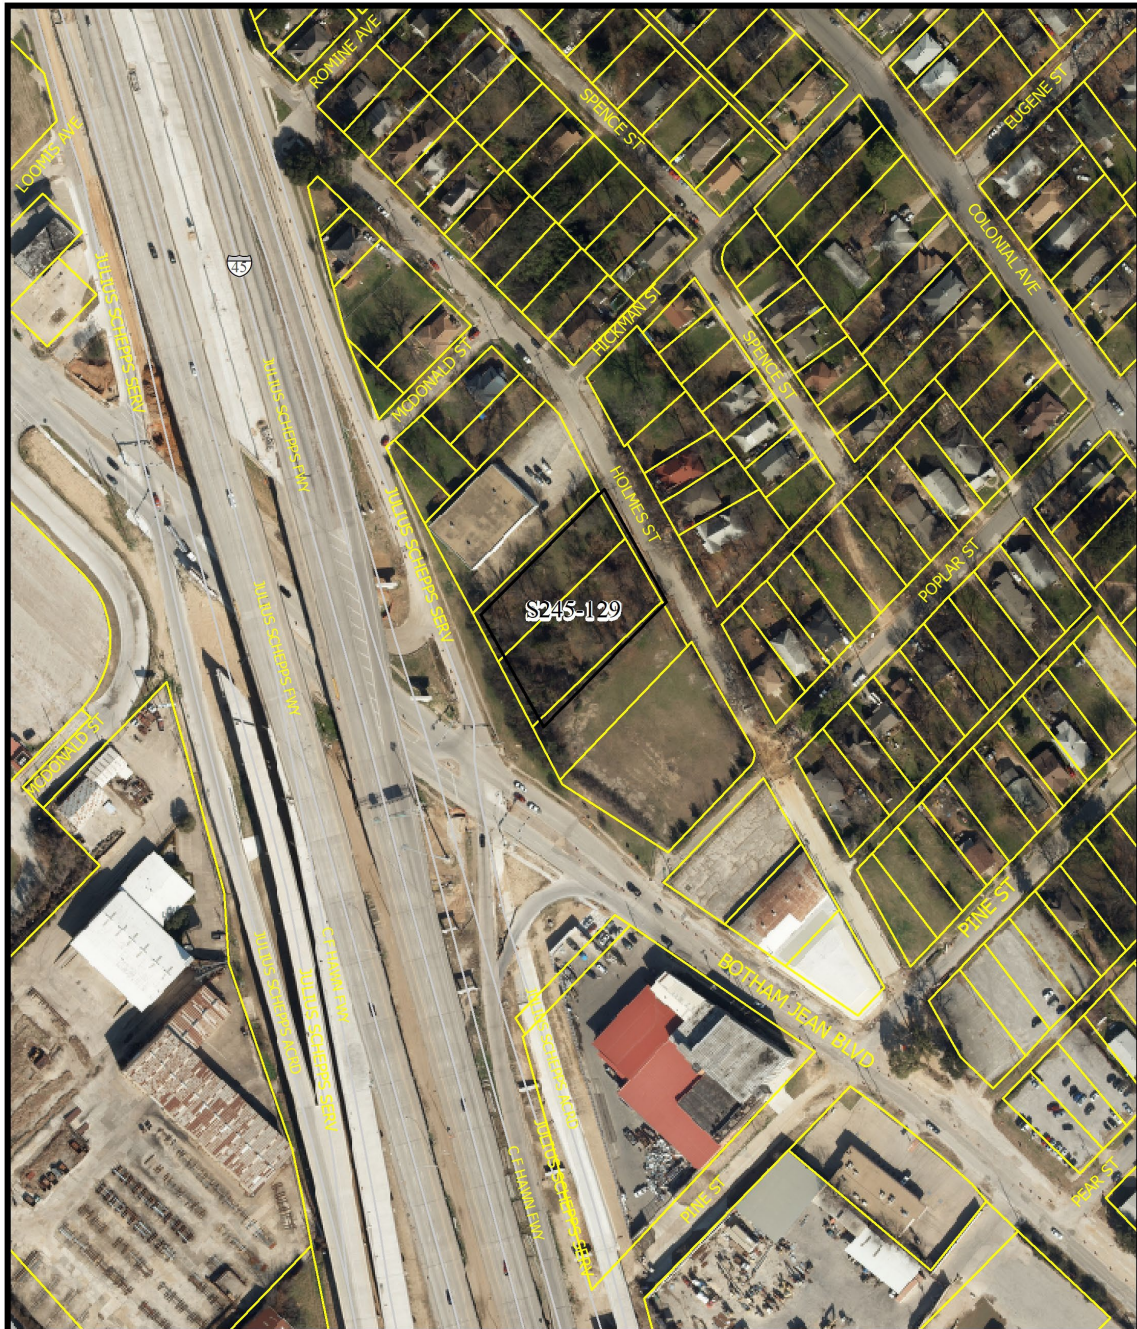

1:2,400

## AERIAL MAP

- ☐ Area of Request
- ☐ Recent History

Case no: **S245-129**

Date: **3/21/2025**

