

**CITY PLAN COMMISSION****THURSDAY, FEBRUARY 19, 2025****RECORD NO.:** PLAT-26-000024**SENIOR PLANNER:** Sharmila Shrestha**LOCATION:** Turner Avenue, north of Colorado Boulevard**DATE FILED:** January 22, 2026**ZONING:** CD-13 (Subarea 3)**CITY COUNCIL DISTRICT:** 1**SIZE OF REQUEST:** 5.6404-acres**APPLICANT/OWNER:** Kessler Park Methodist Church

**REQUEST:** An application to create one 0.5401-acre lot, 0.5072-acre lot, and 4.5931-acre lot from a 5.6404-acre tract of land in City Block 5925 on property located on Turner Avenue, north of Colorado Boulevard.

**SUBDIVISION HISTORY:**

1. S245-042 was a request northwest of the present request to create one 0.976-acre (42,507 square feet) lot and one 0.978-acre (42,584 square feet) lot from a 1.953-acre tract of land containing part of Lot 6 in City Block A/3957 and a tract of land in part of City Blocks 3830 and 3957 on property located on Edgefield Avenue, north of Kessler Parkway. The request was approved on December 5, 2024, but has not been recorded.

**STAFF RECOMMENDATION:** The request complies with the requirements of the CD-13 (Subarea 3) Conservation District; therefore, staff recommend approval of the request subject to compliance with the following conditions:

**General Conditions:**

1. The final plat must conform to all requirements of the Dallas Development Code, Texas Local Government Code, Texas Land Surveying Practices Act and the General Rules and Regulations of the Texas Board of Land Surveying.
2. Department of Development Services, Engineering Division must verify that the plat conforms with the water, wastewater, and easement requirements under the provisions of Chapter 49 of the Dallas City Code.
3. Compliance with all plans, contracts, ordinances, and requirements of the City of Dallas. *Section 51A-8.102(a), (b), (c), and (d)*
4. The number and location of fire hydrants must comply with the Dallas Fire Code.
5. Any new or existing structure may not extend across new property lines. *Section 51A-8.503(e)*
6. On the final plat, all easement abandonments, and ROW abandonments must be by separate instrument with the recording information shown on the face of the plat. A release from the Real Estate Division is required prior to the plat being submitted to the Chairman for signature.

7. On the final plat, include two boundary corners tagged with these coordinates: "Texas State Plane Coordinate System, North Central Zone, North American Datum of 1983 on Grid Coordinate values, No Scale and no Projection."
8. On the final plat, monument all set corners per the Monumentation Ordinance. Prior to submitting the final plat for the Chairman's signature. The monuments must be verified by the Chief City Surveyors Office in the Public Works Department. *Section 51A-8.617*
9. Provide ALL supporting documentation (i.e. deeds, plats, ordinances, easements...etc) with a completed Final Plat Checklist to the Survey Plat Review Group (**SPRG**) with the Final Plat Submittal **after** City Plan Commission Approval.
10. Prior to the final plat, submit a tree survey to the Arborist. A release from the arborist is required prior to an early release request or the recordation of the plat, whichever occurs first.
11. The number of lots permitted by this plat is 3.

#### **Paving & Drainage Conditions:**

12. Submit a Full Set of Civil Engineering Plans (drainage, paving, street signage/markings/lighting) prepared per City Standards by a licensed (TX) Professional Engineer to Engineering Division in Room 200, Oak Cliff Municipal Center (i.e., 311T/DP). Additions and alterations to the public infrastructure require approval and may require private development contracts with bonds.51A-8.102 (c); 8.601(b)(4), (5), (6), (7),(8),(9)
13. Detention may be required if the capacity of available outfall is not adequate to carry the developed runoff.51A 8.611(c)
14. Place a note on the final plat stating "Lot-to-Lot drainage will not be allowed without proper City of Dallas Engineering Division approval" 51A 8.611(e)
15. Existing drainage conveyance within the property is required to be sized in compliance with Section 51A-8.611(a)(1) of the City of Dallas Code.

#### **Right-of way Requirements Conditions:**

16. Dedicate a minimum 5-foot by 5-foot corner clip (via fee simple or street easement) at Colorado Boulevard and Turner Avenue. Section 51A 8.602(d)(1).
17. A larger corner clip may be requested during engineering plan and traffic review to accommodate an adequate turning radius, or to maintain public/traffic appurtenances, within the area of the corner clip. 51A 8.602(d)(1), 51A 8.608(a)

#### **Survey (SPRG) Conditions:**

18. Submit a completed Final Plat Checklist and All Supporting Documentation.

#### **Dallas Water Utilities Conditions:**


19. Additional design information is required for assessment. Site plan must be submitted showing proposed development, building finished floor elevation, development, existing mains – including downstream manhole, and proposed


water and wastewater service locations. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.

20. Water and wastewater main improvement may be required by Private Development Contract. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
21. Existing and any proposed Water and Wastewater Easements must be shown and/or increased to conform to current design standards. Notice: Minimum DWU easement size is 20' for one utility and 25' for both water and sewer. Larger diameter or deeper mains may require additional width.

**Street Light/ Street Name Coordinator/ GIS, Lot & Block Conditions:**

22. Additional design information needed to complete review. Provide a brief description of the proposed project and a copy of the site plan to [daniel.silva@dallas.gov](mailto:daniel.silva@dallas.gov) to determine street lighting requirements.
23. On the final plat, change "Greenbrier Lane" to "Greenbriar Lane".
24. On the final plat, identify the property as Lots 1, 2, and 3 in City Block A/5925.

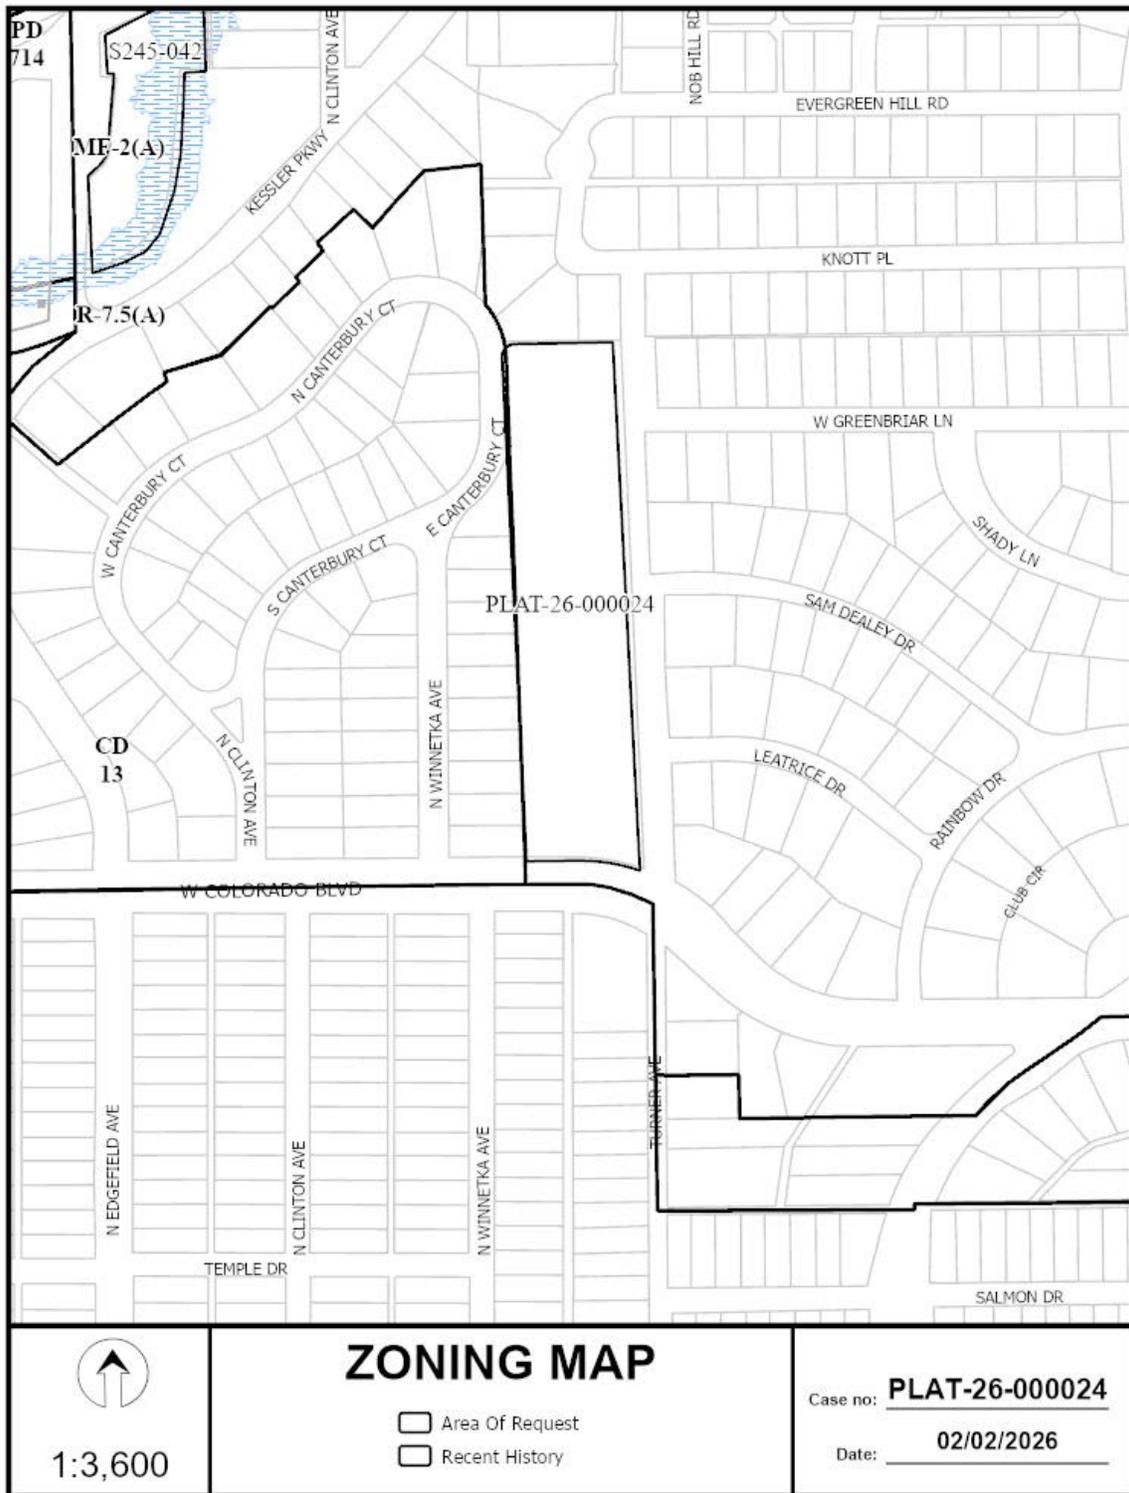

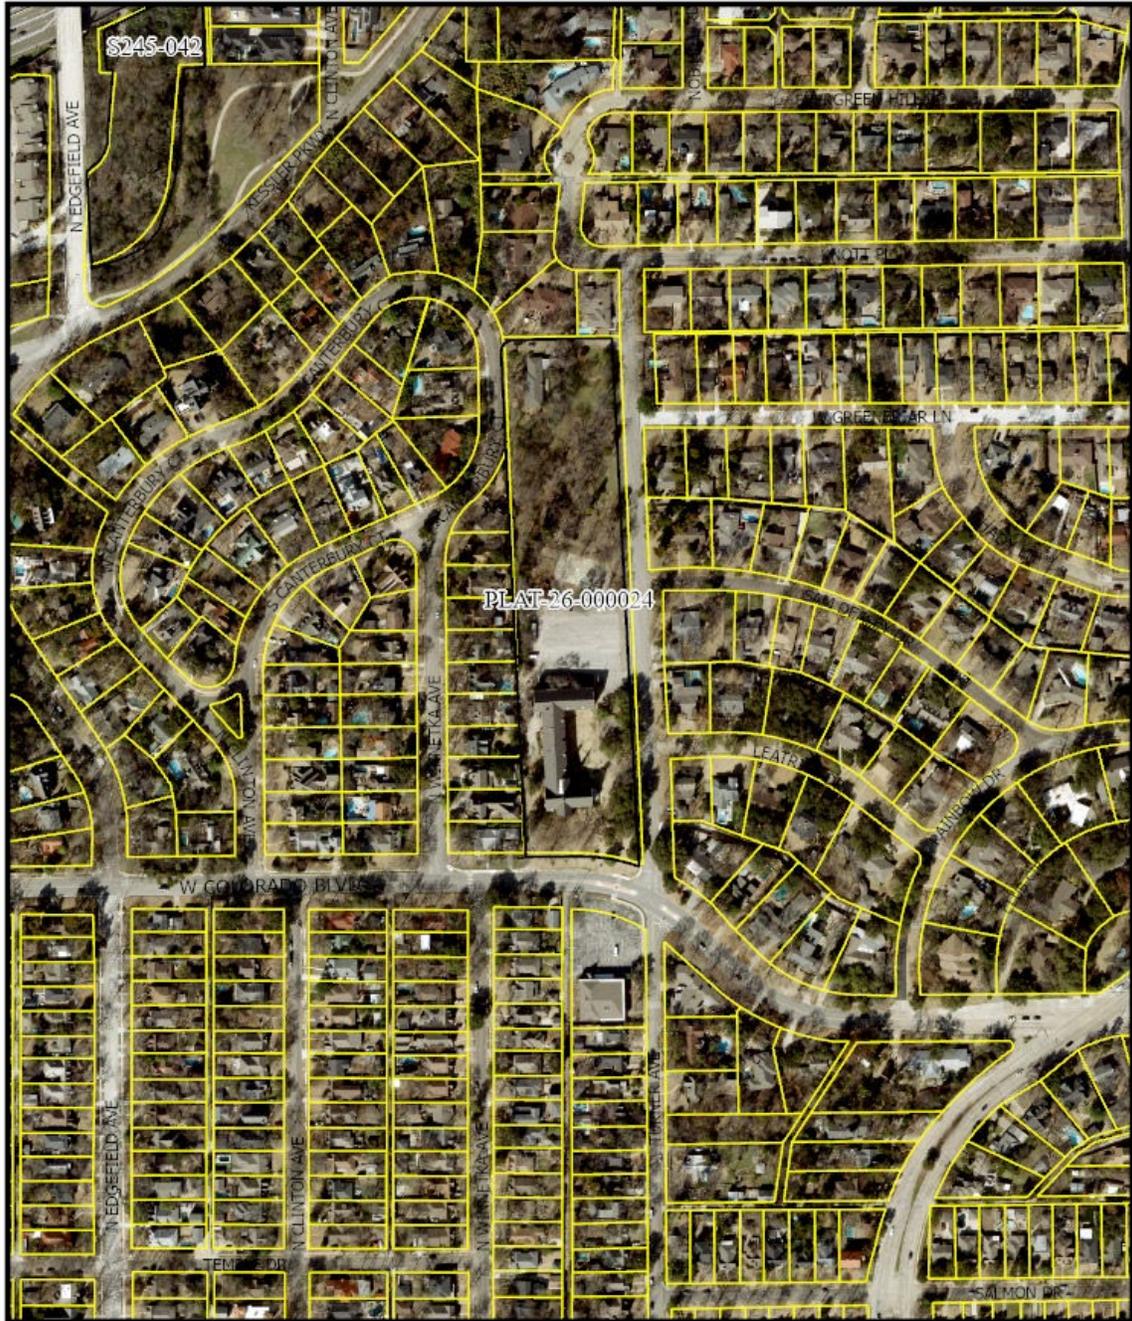

 1:3,600	<h3 style="text-align: center;">AERIAL MAP</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> Area Of Request</li> <li><input type="checkbox"/> Recent History</li> </ul>	Case no: <u>PLAT-26-000024</u> Date: <u>02/02/2026</u>
--	---	---



