

CITY PLAN COMMISSION**THURSDAY, JANUARY 23, 2025****FILE NUMBER:** S245-055**SENIOR PLANNER:** Hema Sharma**LOCATION:** Peak Street at San Jacinto Street, southeast corner**DATE FILED:** December 26, 2024**ZONING:** PD 298 (Subarea 4)**PD LINK:** <https://dallascityhall.com/departments/city-attorney/Articles/PDF/Article%20298.pdf>**CITY COUNCIL DISTRICT:** 2**SIZE OF REQUEST:** 1.051-acres**APPLICANT/OWNER:** Arham Opportunity Investments, Emanuel Lutheran Church

REQUEST: An application to replat a 1.051-acre tract of land containing all of Lot 9A in City Block 16/647 to create one 0.230-acre lot and one 0.821-acre lot on property located on Peak Street at San Jacinto Street, southeast corner.

SUBDIVISION HISTORY:

1. S234-082 was a request northwest of the present request to replat a 0.213-acre tract of land containing part of Lot 10 and all of Lot 10A in City Block 3/649 to create one lot on property located on Roseland Avenue at Peak Street, south corner. The request was approved on May 2, 2024 but has not been recorded.
2. S223-244 was a request west of the present request to replat a 0.115-acre tract of land containing part of Lot 17 and 18 in City Block 3/649 to create one lot on property located on Ripley Street, southeast of Roseland Avenue. The request was approved on September 21, 2023 but has not been recorded.
3. S223-153 was a request south of the present request to replat a 0.557-acre tract of land containing all of Lots 1 through 3 in City Block 14/717 to create one lot on property located on San Jacinto Street at Peak Street, south corner. The request was approved on June 15, 2023 but has not been recorded.
4. S212-077R was a request north of the present request to replat a 0.79-acre tract of land containing part of Lots 1, 2, and 3 in City Block 1/650 to create one 4,987 square foot and one 29,440 square foot lot on property located on Ross Avenue at Carroll Avenue, west corner. The request was approved on November 3, 2022 but has not been recorded.
5. S212-007 was a request southwest of the present request to replat a 0.9785-acre tract of land containing part of City Block 15/646 to create one lot on property located on Peak Street, Between Ross Avenue and San Jacinto Street. The request was approved on November 4, 2021 but has not been recorded.
6. S201-669 was a request north of the present request to to replat a 0.265-acre tract of land containing all of Lot 7 and part of Lot 6 in City Block 2/650 to create one lot on property located on Ross Avenue at Ashby Street, northwest corner. The request was approved on June 3, 2021 but has not been recorded.

7. S190-170 was a request west of the present request to replat a 0.409-acre tract of land containing all of Lots 8 and 9 in City Block 3/649 to create one lot on property located on Ross Avenue at Peak Street, west corner. The request was approved on July 23, 2020 but has not been recorded.
8. S190-132 was a request southeast of the present request to replat a 0.550-acre tract of land containing part of Lots 3, 4, and 5 in City Block 2/715 to create one lot on property located on Scurry Street at Burlew Street, south corner. The request was approved on June 4, 2020 but has not been approved
9. S190-118 was a request southeast of the present request replat a 0.440-acre tract of land containing all of Lot 1 and part of Lot 2 in City Block 4/714 to create one lot on property located on Scurry Street at Burlew Street west corner. The request was approved on April 9, 2020 but has not been approved.

STAFF RECOMMENDATION: The request complies with the requirements of the PD 298 (Subarea 4); therefore, staff recommends approval of the request subject to compliance with the following conditions:

General Conditions:

1. The final plat must conform to all requirements of the Dallas Development Code, Texas Local Government Code, Texas Land Surveying Practices Act and the General Rules and Regulations of the Texas Board of Land Surveying.
2. Department of Development Services, Engineering Division must verify that the plat conforms with the water, wastewater, and easement requirements under the provisions of Chapter 49 of the Dallas City Code.
3. Compliance with all plans, contracts, ordinances, and requirements of the City of Dallas. *Section 51A-8.102(a), (b), (c), and (d)*
4. The number and location of fire hydrants must comply with the Dallas Fire Code.
5. Any new or existing structure may not extend across new property lines. *Section 51A-8.503(e)*
6. On the final plat, all easement abandonments, and ROW abandonments must be by separate instrument with the recording information shown on the face of the plat. A release from the Real Estate Division is required prior to the plat being submitted to the Chairman for signature.
7. On the final plat, include two boundary corners tagged with these coordinates: "Texas State Plane Coordinate System, North Central Zone, North American Datum of 1983 on Grid Coordinate values, No Scale and no Projection."
8. On the final plat, monument all set corners per the Monumentation Ordinance. Prior to submittal of the final plat for the Chairman's signature. The monuments must be verified by the Chief City Surveyors Office in the Public Works Department. *Section 51A-8.617*

9. Provide ALL supporting documentation (i.e. deeds, plats, ordinances, easements...etc) with a completed Final Plat Checklist to the Survey Plat Review Group (**SPRG**) with the Final Plat Submittal **after** City Plan Commission Approval.
10. Prior to the final plat, submit a tree survey to the Arborist. A release from the arborist is required prior to an early release request or the recordation of the plat, whichever occurs first.
11. The number of lots permitted by this plat is 2.

Paving & Drainage Conditions:

12. Submit a full set of Civil Engineering Plans (drainage, paving, street signage/markings/lighting) prepared per City Standards by a licensed (TX) Professional Engineer to Engineering Division in Room 200, Oak Cliff Municipal Center (i.e. 311T/DP). Additions and alterations to the public infrastructure require approval and may require private development contracts with bonds. 51A-8.102 (c); 8.601(b)(4),(5),(6),(7),(8),(9)
13. Detention may be required if the capacity of available outfall is not adequate to carry the developed runoff. Section 51A-8.611(c).
14. Place a note on the final plat stating "Lot-to-Lot drainage will not be allowed without proper City of Dallas Engineering Division approval" 51A 8.611(e)

Right-of way Requirements Conditions:

15. On the final plat, dedicate a minimum 5-foot by 5-foot corner clip (via fee simple or street easement) at the intersection of San Jacinto Street & Peak Street. Section 51A 8.602(d)(1)
16. A larger corner clip may be requested during engineering plan and traffic review to accommodate an adequate turning radius, or to maintain public/traffic appurtenances, within the area of the corner clip. *Section 51A 8.602(d)(1), 51A 8.608(a)*
17. Must coordinate with Transportation Department for any traffic signal requirements that are deemed necessary for improving pedestrian accessibility and safety related to site development (Contact Srinivasa Veeramallu with Traffic Signals). *51A-8.606, 51A-8.608*

Survey (SPRG) Conditions:


18. Prior to final plat, submit a completed final plat checklist and all supporting documents.
19. On the final plat, show recording information on all existing easements within 150 feet of the property.
20. On the final plat, show all additions or tracts of land within 150 feet of the property with recording information. Platting Guidelines.

Dallas Water Utilities Conditions:


21. Engineer must furnish plans for water and sanitary sewer. Developer must furnish a contract for water and sanitary sewer. Sections 49-60(g)(1) and (2) and 49-62(b), (c), and (f).
22. Additional design information is required for assessment. Site plan must be submitted showing proposed development, building finished floor elevation, development, existing mains – including downstream manhole, and proposed water and wastewater service locations. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.
23. Water main improvements is required by Private Development Contract. Submit water/wastewater engineering plans to 320 E. Jefferson Blvd., Room 200, Attention: Water and Wastewater Engineering.

Real Estate/ GIS, Lot & Block Conditions:

24. Prior to the final plat, please show abandonment authorized by Ordinance No. 31850 and amended by Ordinance No. 32192, recorded as Inst. No. 202200188751. Utility Easements retained.
25. On the final plat, identify the property as Lots 9B & 9C in City Block 16/647.

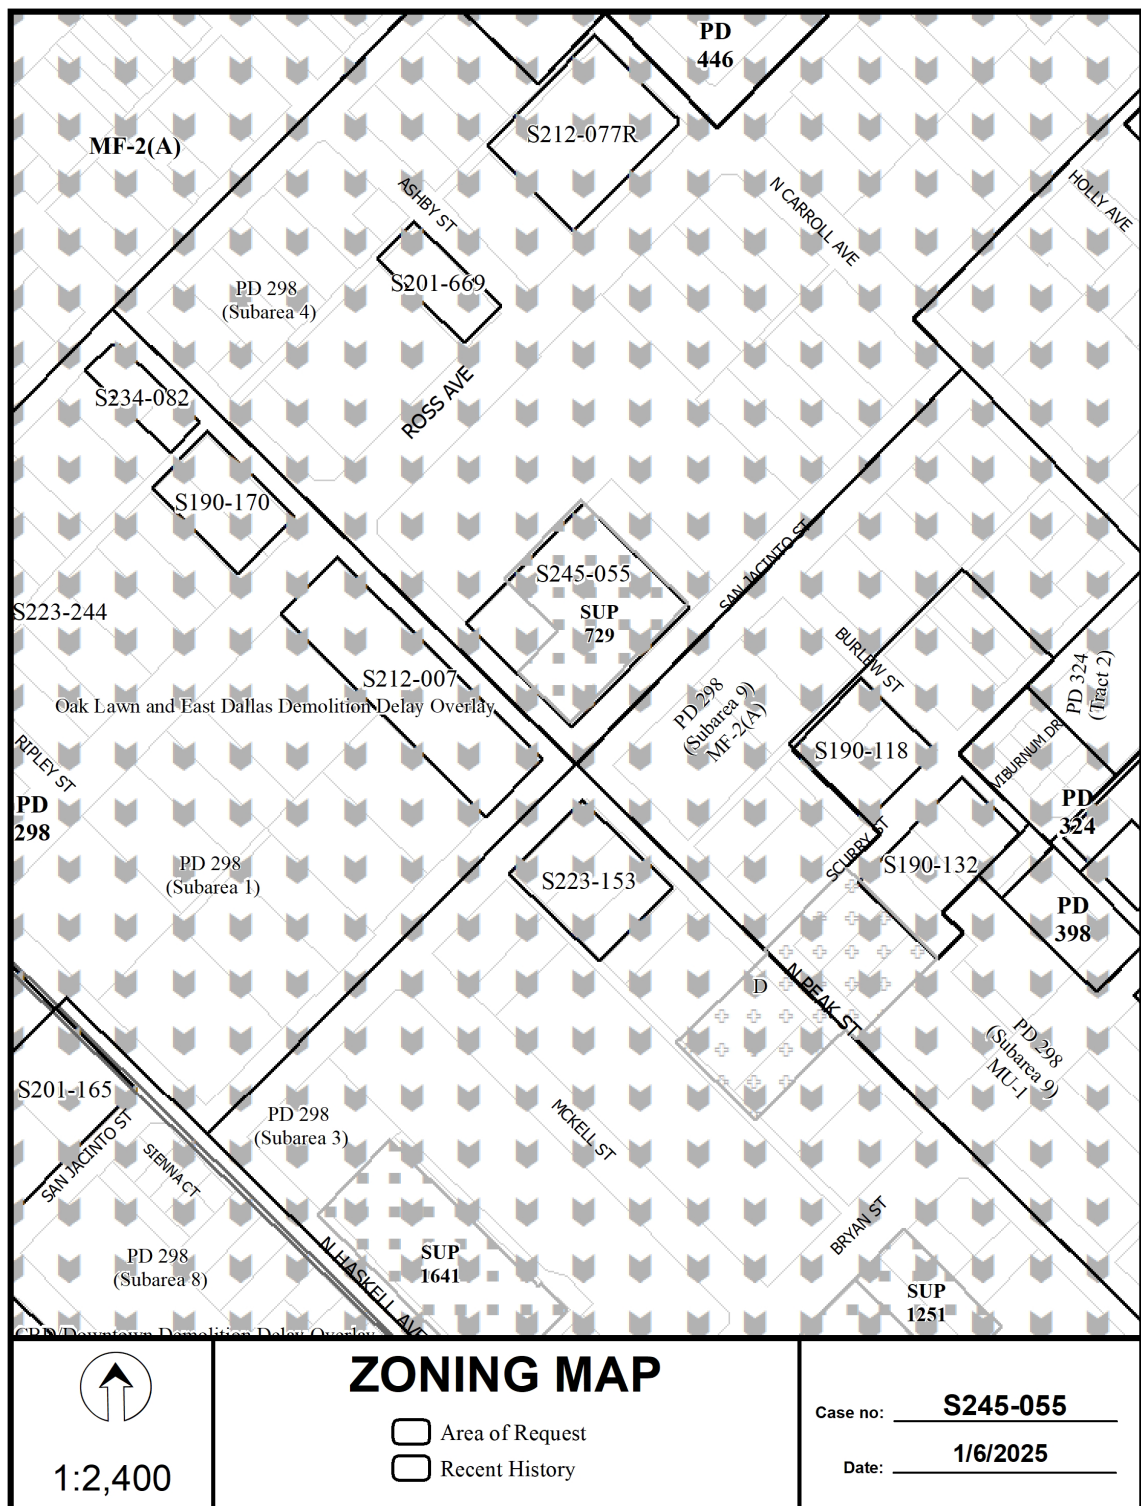



 1:2,400	<h2 style="text-align: center;">AERIAL MAP</h2> <p> <input checked="" type="checkbox"/> Area of Request <input type="checkbox"/> Recent History </p>	Case no: <u> S245-055 </u> Date: <u> 1/6/2025 </u>
--	---	---

